

EATON Exit Sign

SafeLite



Durable LED emergency light and exit sign with selectable modes, easy surface mounting, and full European compliance.

Applications: Escape routes, open areas, commercial sites, offices, and public buildings.



Features

- **Function & Operation:** Emergency luminaire or exit sign with stand-alone test and rest mode (TLU), maintained/non-maintained selectable.
- **Performance:** 60lm (mains), 3hrs duration, 20m viewing distance.
- **Electrical:** 230V \pm 5% (220-240V) 50/60Hz, Ni-Cd battery, LED strip light source.
- **Construction:** Polycarbonate housing (RAL9003), 850°C glow wire tested, Class II insulation.
- **Mounting:** Surface type, quick installation or retrofit.
- **Environment:** +5 °C to +40 °C operating temperature.
- **Compliance:** EC & EN certified for escape, anti-panic, and exit applications.

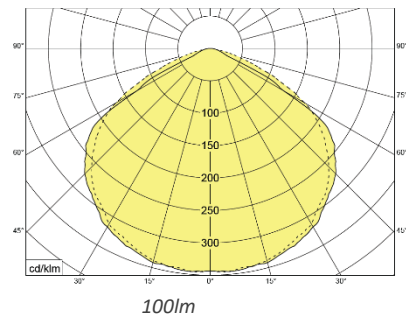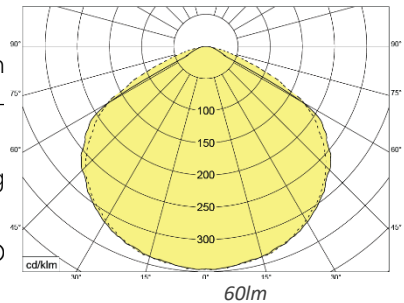

Specs

SL2MNM42C3C3A	Wall Mounted Emergency Exit Sign, IP42, IK04, 60 lm (emergency), 2.7 VA / 2.6 W (NM), 2.8 VA / 2.7 W (M), 3.6 V 0.8 Ah, 0.5 kg.
SL2MNM65D3C3A	Wall Mounted Emergency Exit Sign, IP65, IK07, 100lm (emergency), 3.2 VA / 2.5 W (NM), 3.8 VA / 3.2 W (M), 3.6 V 1.7 Ah, 0.7 kg, ISO (L, R, D).
SL2RBRC	Recessed base, compatible IP42 & IP65 variants, suitable for double side diffusers.
SL2CD	Double Side Cone Diffuser Emergency Exit Sign, IP42, 60lm (emergency).
SL23A	Set of adhesive exit legends, ISO7010 format, 3x Adh (Left, Right, Down).

Dimensions

